




# SPINA CILINDRICA E FILETTATA

ELEMENTI NORMALIZZATI

## SPINA CILINDRICA CON FORO FILETTATO

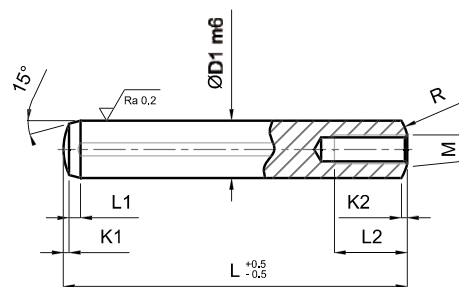

**ACCIAIO:** Per lavorazione a freddo  
**DUREZZA:** HRC 60 ± 2  
**TOLLERANZA:** H6 a richiesta

D1	M	L1	L2	K1	K2	R	L																		
							20	24	30	36	40	45	50	60	70	80	90	100	120	140	160				
6	4	1,5	6	0,6	0,8	6	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
8	5	1,8	8	0,8	1	8	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
10	6	2	10	1,0	1,2	10	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
12	8	2,5	10	1,2	1,6	12	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
14	8	2,5	12	1,4	1,8	14	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
16	8	3	12	1,6	2,0	16	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
18	10	3,5	16	1,8	2,5	18	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
20	10	4	16	2,0	2,5	20	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-



[www.eleNorm.com](http://www.eleNorm.com)